Board of Regents
University System of Georgia
Office of Facilities

2000 PREPLANNING GUIDELINES

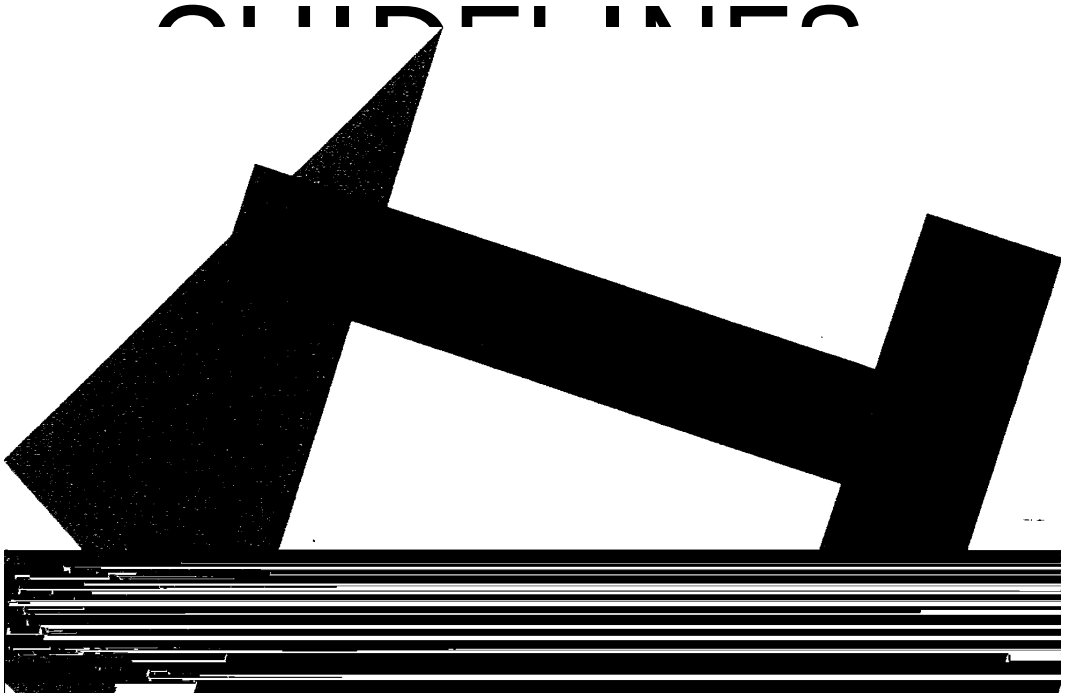

Table of Contents

PART I – Guidelines For Preplanning

Introduction ..... Page 1
Principles For Capital Resources Allocation ..... Page 1
Preplanning Defined ..... Page 3
Building Renovations or Additions ..... Page 4
New Construction ..... Page 5
Technology Considerations ..... Page 6
Historic Properties ..... Page 7

Introduction

t its July 9, 1997 meeting, the Board of Regents of the University System of Georgia adopted the University System of Georgia Comprehensive Plan 1996-97. This plan incorporated four sets of comprehensive planning principles to guide actions dealing with enrollment planning, workforce planning, academic planning, and the provision of facilities.

The first three principles pertaining to enrollment, workforce, and academic planning are summarized below.

Enrollment planning principles set the context for the ensuring development of enrollment targets for the System and each institution;

Workforce planning principles were developed using the statewide needs assessment, which was funded by ICAPP (Georgia's Intellectual Capital Partnership Program). The resulting list of high demand occupations should spur program development and student interest and should also inform program expansion; and

Academic planning principles resulted in the modification of the program approval and review process. Although institutional initiatives will continue to drive new program development, state needs will play a larger role in the future in determining which new programs should be approved and which existing programs should be discontinued. The Board may also initiate the call for new programs.

Although these four sets of principles work together to provide the guidance for the System's planning and decision-making processes, the fourth set of principles on Capital Resources Allocation are central to the focus of this document and are fully reprod

Principal 6

Where other than State financial resourc

No matter how simple or technically difficult a capital project may be, the preplanning process is critical to the project's success. Preplanning is necessary to establish and reinforce user objectives, to confirm the practicality of the project, and to assess the multiple relationships that will affect the project

Building Renovation or Addition

f the project intends the renovation, rehabilitation, modernization, preservation, or other revitalization of an existing building, the campus should consider the following basic questions as part of the preplanning activities:

Is all of the building to be included in the project? If not, what portion of the building does the project intend to renovate?

Will it be necessary to maintain current operations in the portion of the building not being altered? An important question to ask at this time is, “Is it permissible by the appropriate building code(s) to leave any part of the building unaltered?”

Frequently, the building code(s) and/or other regulations require “upgrading” of all of the building elements, although they may not be directly affected by the renovation. The earlier that this question is answered, the less likely it is that unanticipated costs will result during the latter stages of the project. It should not be automatically presumed that any non-conforming situation will be “grandfathered” into the new project.

Is this an historic building? Is it listed on the Georgia Register? How will the historic context of the building be accommodated by the desired project?

Are there environmental concerns? When will the GEPA and SHPA evaluations be performed, and by whom?

Othe

PREPLANNING GUIDELINES

University System

Although the project's design professional (generally an architectural firm) will design the project to meet applicable codes consistent with the Standard Building Code, an assessment of the building's functional requirements during preplanning is necessary to allow the designer and the user to start from a uniform basis of understanding. It is also important to assess the full range of technological requirements, including active and passive heating and cooling, conduit and cabling needs, energy management system and emergency power needs, along with many others, during p0.02 0 0 10.02 224.063: (g)Tj-0.00l4.02 164.61101 585.77990 10.00U0.02 224.01893 T

PREPLANNING GUIDELINES

Preplanning Guidelines for Space Allocation

The objective of any building project, whether new construction or the renewal of an old facility, is to provide the size, configuration, and relative juxtaposition of spaces needed to properly support an approved program objective. In striving to reach the optimum physical characteristics, the building's design team will be required to make a series of tradeoff decisions in order to fit the building on the owner's preferred site, to keep the overall project contained within its budget allocation, to provide needed or perceived lobby space or formal entryways, to house all of the program requirements, etc. This process can be a long and burdensome one for all parties, or it can be accomplished efficiently and in a timely manner.

The success of any capital project can frequently be linked directly to how well the project was started, and the start is dependent on the "quality" of information initially provided to the design team by the user's representatives. In this regard, the design team will be expected to provide alternative design solutions; these will be discussed and debated among the users and finally result in an approved design concept. In order for the designers to meet this expectation, it is incumbent that the user's representatives provide a comprehensive, well conceived program document that, among other things, identifies the room size parameters and adjacencies that are required to support the program objectives.

There are several ways that the user(s) can establish space need parameters as part of the project's program documentation. One way is to rely on traditional practices and previous experience. The following section of these Guidelines provides examples of this methodology. This is generalized information that can be helpful when considering traditional types of space. More sophistication can be introduced by referencin

Classrooms
Including Seminar Rooms

t is likely that classrooms, including seminar and conference-type rooms, will rapidly evolve to support a variety of stat

The program should confirm and validate the number of each type of reading station. All reading stations should have data and power access. The following types of reading stations may be anticipated:

General Purpose Reader Stations: sized at 25-30 ASF per station;
Study Carrels: 35-40 ASF per station;
Telecommunications/Computer Workstations: 45-50 ASF/station; and
Individual/ Group Study Rooms: Generally 30-35 ASF/student.

Stack Space

Stack space includes "Open stacks" and "Movable Aisle Compact Shelving" (MACS).

Generally, a library will house “non-book

Table 6

Campus Student Enrollment (EFTS)	*Square Feet (ASF)*
Minimum eligibility	24,000 ASF

Support facilities, such as lockers and showers, are typically provided in the campus gymnasium rather than in free-standing buildings.

Plant Operations
(Physical Plant)

n appropriately sized and configured corporation yard is vital to the operation and maintenance of all campus eipe

PREPLANNING GUIDELINES

Building Design Philosophy

Introduction

his section of the his section of the Preplanning Guidelines is intended to assist the campus user group and the professional consultant in the preparation of the Bui 10.02 0 0 10.02 57.78519 ±0.0p

PREPLANNING

G

Paving & Storm Water Management

Design preference: Reduce the amount of project-related storm water runoff and increase the amount of ground water recharge.

Rationale: The use of concrete and asphaltic paving for sidewalks, driveways, parking lots and similar purposes has the result of: 1) sealing the surface of

Space Organization

Design preference:

Provide a design that reduces the need for vertical transportation as the height of the building increases.

Locate heavy or vibration-sensitive equipment on grade.

Develop a simple, clear circulation pattern that smoothly accommodates the building's access needs.

Rationale: Building efficiencies can frequently result from stacking building functions with the more dense-use spaces (number of people that use a room or space on a routine basis) located at the main floor, followed by the next dense function on the second floor, and so forth. Other efficiencies can result from locating spaces that will house heavy objects (heavy instructional or research equipment, building-support mechanical equipment) on the ground floor (or basement), and still other efficiencies can result from locating vibration-sensitive equipment on grade. All of these factors should be considered, and the most efficient configuration that will accommodate a building's program requirements should be considered. The key to achieving this preference is simplicity. For example, group or stack like functions, reduce the people-load spaces as the building's height increases, develop a clear and simple circulation pattern, and incorporate a user-friendly concept that responds to life-safety requirements. A stacking diagram should be developed by the project's designer and presented to the user/owner as part of the Schematic Plan review process.

Room Shapes

Design preference: All rooms should be designed to accommodate the prescribed programmatic requirements but configured to allow reasonable re-use of the rooms for other purposes. Oddly shaped rooms should be avoided.

Rationale: Careful consideration needs to be given to the shape of each room. For example, classrooms should be configured to allow reasonable sight distances between the instruction station and the student stations – rooms with unusual or extreme dimensions (e.g. long, narrow rooms, pie-shaped rooms, etc.) do not serve these purposes well and severely limit the ability to adapt these spaces for other future uses. Careful attention must also be given to the placement of doors and windows because these relationships can either enhance or detract from the usefulness of a room.

Height Requirements

Design preference: New construction should

P

Roof Design

Design preference: New buildings should be conceived utilizing a roof pitch appropriate for the size, type and location of the building. A pitch of 3 units of rise in 12 units of run is desirable, but the rise to run ratio should not be less than 1:12

Rationale: Roof leaks are among the most troublesome, costly and recurring maintenance issues on our campuses. Leaks result from "sloped to drain" roofs due to settling of the building that allows water to pond, the separation of flashing, poor detailing at joints and changes in materials, punctures and a variety of other reasons. These problems are exacerbat4ed when parapet structures are created necessitating both surface and overflow scuppers or drains. Parapets also can create dams that contribute to the retention of water and debris. For example, in FY1999, more than $7 million in major repair and renovation funds were allocated for 43 roof repair/replacement projects at 20 campuses. This does not include many more similar projects that were undertaken with other campus resources by the campuses. Pitched roofs do not exhibit as many of these negative characteristics as do the nearly flat "sloped to drain" roofs.

Interior Materials & Equipment

Design preference:

Carefully evaluate the use of materials to provide an appropriate cost-to-benefit ratio for the intended life of the building.

Use consistent materials throughout the building whenever practical.

Maintainability, Service & Technology

Design preference:

New construction and renovations should be designed to allow and encourage the proper maintenance of building components and systems;

Appropriately sized and located spaces should be provided for building support/custodial purposes; and;

Building systems should be designed commensurate with the institution's capability to provide necessary maintenance and upkeep; do not over design the electrical or mechanical systems or provide a more sophisticated system than necessary.

Rationale: Because it is likely that buildings will serve a useful purpose for more than 50 years, every effort should be made during the project's design development phase to ensure that the final design allows simple and easy maintenance. For example, the design of atrium spaces should accommodate the need to change lights at great heights; mechanical spaces should allow sufficient space surrounding all equipment to allow for proper maintenance of the equipment, including the changing of filters, replacing motors, servicing coils, etc.; and exterior features such as sun screens, canopies or other architectural features should be designed to allow appropriate maintenance, including cleaning and painting. Each building should incorporate janitorial closets or other suitable spaces to support the routine need for custodial services and the storage of regularly used supplies (e.g., cleansers, toilet paper, floor wax, and similar materials that are used on a routine basis). Spaces for these purposes should not be shared with other building support or "program" spaces. It is important that the designer understand and appreciate the campus' capability for maintenance of the designed system does not exceed the campus' capability to provide for these maintenance and operational needs.

Systems Design

Design preference: New construction and major renovation projects should be designed to allow for the logical and cost-effective removal and replacement of building engineered equipment systems and components that have reached the end of their useful life.

Rationale: It is recognized that certain building engineered equipment systems and components will

Telecommunications, Including Voice, Video & Data

Design preference: Telecommunications commensurate with the project's program should be accommodated comprehensively in the final bid set and within the construction budget (drawings and specifications).

Rationale: The designer is responsible for accommodating the program requirements for all systems, including telecommunications and the project's cost estimate has been calculated to include a reasonable cost for an appropriate telecommunications system. The building's telecommunications needs are as important as any of the other building systems, but frequently are not considered until the final design stages of design development. When this happens,

Physical Master Plan: The investigation and documentation of existing and proposed conditions and objectives that contribute to a proposed set of recommendations (narrative, tabular, graphic) for future development.

Performance Standards: Any particular functional level of performance or impact intended in the design or development of a given facility. Example include: positioning of a building to avoid casting shadows on an important space, provision of adequate visibility for security purposes, direction of emission of site lighting to avoid glare on adjacent properties, etc.

Project Cost Estimate:
contriencate glcndncate0011 Tc -0.00211 Tw 107.1497 TD[(contri)7e

Equipment is provided in a capital project in two ways, fixed equipment and loose equipment.

Fixed equipment (sometimes referred to as Group I Equipment) is defined as built-in equipment that is installed as a part of the construction project. Examples include science laboratory benches, fume hoods, distilled water systems, wind tunnels, theater rigging, etc. Fixed equipment includes all program-specific build-in items. Funds for fixed equipment are included in the project's construction budget.

Loose equipment sometimes referred to as Group II Equipment) also includes program-specific items, but these are portable or movable items that do not require permanent attachment to the building r significant utility connections. Loose equipment items are not included in the construction budget, but are included within the project's total cost. Examples include tables, chairs, and other office-type furniture, laboratory preparation equipment, dishwashers, etc.

Certain equipment items cannot be purchased with bond funds and should not be included in the capital project budget. Examples of such non-eligible equipment include items with a useful life of less than five years, computers and peripherals, coin operated machines, and expendable items which may be easily removed from the facility or depleted by use.

It is expected that each capital project will be completed in such a manner as to provide a fully operable facility, including all infrastructure needs. The project's infrastructure requirements should be evaluated as part of the project's programming phase and the project scope and budget should be adjusted appropriately if additional infrastructure needs are required. In this regard, infrastructure includes all utilities, fixed telecommunication and alarm systems, roads, drives, parking lots, exterior lighting, signage, storm water management requirements, landscaping, and potentially other features that are required to allow the facility to operate as envisioned.

PREPLANNING GUIDELINES

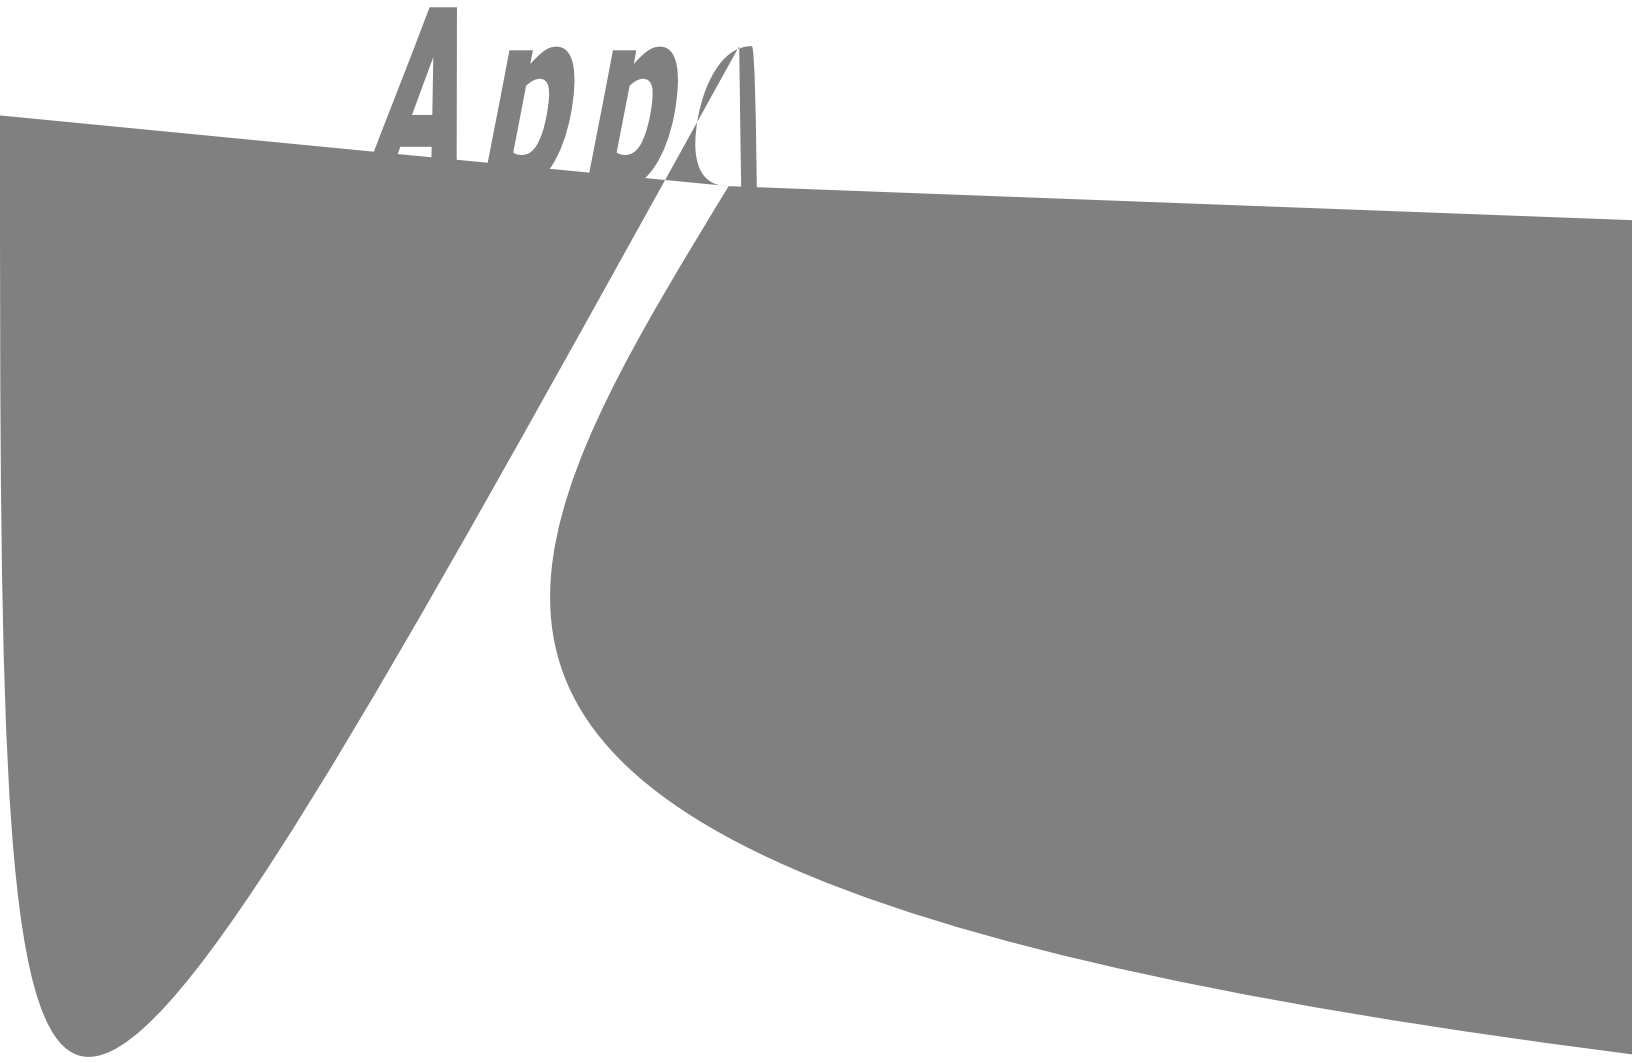

Appendix 1

PREPLANNING

G

Year 1	**Year 2**	Year 3	Year 4	Year 5
Project Initiation	Project Update	Project Refinement	Final Development	Project Funding

Year Two – To advance to Year Three, additional project detail will be required. The five-page justification statement should be updated to include current information and expanded to discuss those functions the new or renewed facility will accommodate, together with the provision of information concerning the desired number of classrooms, laboratories, faculty offices, etc. Emphasis should be placed on the physical characteristics associated with the proposed capital project, i.e., site, situation, utility capacity, etc. In addition, the Year Two report should include information regarding any secondary and tertiary effects that will result from the project, in addition to a brief analysis of the project's utility requirements and the relationship and impact to the campus' existing utility infrastructure. The cost estimate should be updated. This information should be presented in a concise, seven to 10-page project justification statement.

Year 1	Year 2	**Year 3**	Year 4	Year 5
Project Initiation	Project Update	Project Refinement	Final Development	Project Funding

Year Three – To advance to Year Four, the previous justification statement should be updated and expanded to delineate the academic program(s) that will be housed in the new or rehabilitated facility, specify the number of faculty and staff to be accommodated with office space or other features of the building project and, in general, refine and expand the justification for this project. If this project anticipates a new building or a land acquisition, this report should also thoroughly review the options considered and the rationale for selecting the identified site or land acquisition.

Year 1	Year 2	Year 3	**Year 4**	Year 5
Project Initiation	Project Update	Project Refinement	Final Development	Project Funding

Year Four – A complete building program document, including all appropriate BOR forms, will be required to move a project into Year Five; campuses are encouraged to retain the services of a professional to assist in creating this documentation. The program should address the EFT capacity of the desired project and identify how this capacity will be accommodated by the project, i.e., number of lecture stations, laboratories, etc. Likewise, the program document should identify the desired method of accommodating this need (i.e., 35-station classrooms, large lecture halls, studio, wet or dry laboratories, etc.) and should also address all of the features that will be necessary to support the odoesj4d.esj48004 ref568.56 668. Tw -25.905

PROCEDURE

The current five-year rolling plan for Major Capital Projects lists a total project value of approximately $500,000,000. It is intended that the plan will be maintained at about this level by calculating the total value of projects funded and annually adding an equivalent dollar value of new or amended projects to the plan. Projects will be incorporated within the five-year rolling plan in the following two-part procedure:

1) Each campus may prepare and present to the Office of Facilities justification for a new major capital project. This material must include all of the information indicated in *Instructions for preparation of Five-year Capital Outlay Funding Request* (Major Capital Project portion), together with the two-page "Major Capital Project Summary." Staff of the Facilities Office will review and screen the proposals to a manageable number (perhaps 25) that will be presented to the Board of Regents for consideration. The objective of this initial review by the Board will be to further reduce the proposals to one and one-half times (in dollar value) the number eligible for placement in to the five-year rolling plan (e.g., if 8 projects are needed to meet the dollar objective, 12 projects will be forwarded for further consideration).

2) Each of the projects emerging from this initial staff and Board screening will be formally presented to the Board of Regents (Committee of the Whole) by the sponsoring president in the same manner as was followed in June 1997. After all projects have been presented, the Regents will: (1) select those projects that will be added to the rolling five-year plan; and (2) determine the order in which each project will be placed within the plan.

Some Notes:

Projects added to the rolling five-year plan for Major Capital projects generally will be placed in the plan's Project Initiation year. However, in extraordinary circumstances a project may be placed at any location within the plan.

Projects that are currently in the plan may be reconsidered to amend the project's scope (size, context, cost, etc.). The campus may seek to replace a project (at the same place in the plan) with a different project for extraordinary reasons only.

<u>Projects that are not being actively pursued by the sponsoring campus</u> (as described in the process above<u>) may be considered for removal from the list.</u>